


PBR-PANEL

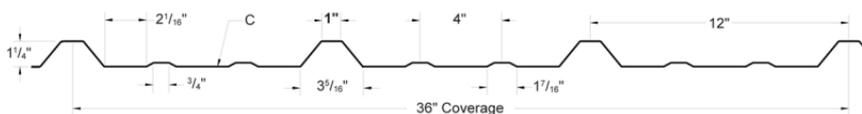

ARCHITECTURAL
COMMERCIAL
INDUSTRIAL
PANEL

DIRECT
FASTEN


36"
COVERAGE

MINIMUM
1:12 SLOPE

OPEN FRAMING OR
SOLID SUBSTRATE


PANEL OVERVIEW

- ▶ Finishes: Kynar 500 (PVDF), MS Colorfast45®, and Acrylic Coated Galvalume®
- ▶ Gauges: 26ga and 24ga standard, 22ga optional
- ▶ 36" panel coverage, 1 1/4" rib height
- ▶ Applies over open framing or solid substrate
- ▶ Exposed fastened metal building panel
- ▶ Trapezoidal rib on 12" centers
- ▶ Minimum roof slope: 1:12

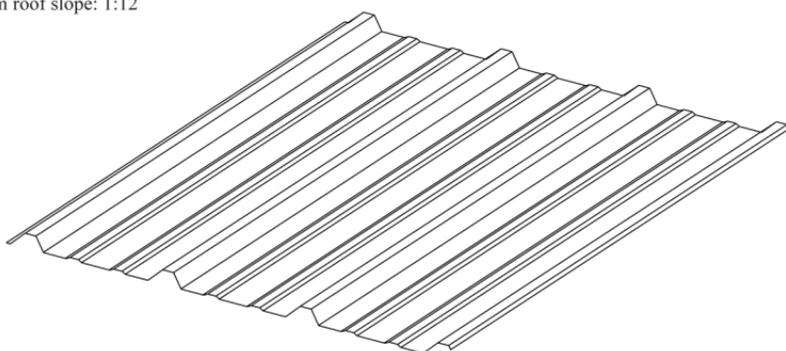

PBR-PANEL

ATTACHMENT DETAIL

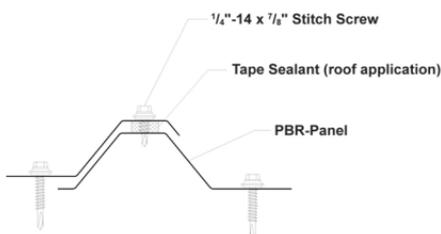

FASTENING PATTERNS

PBR-Panel Fastening Pattern - Interior of panel



PBR-Panel Fastening Pattern - Ends of panel



GENERAL INFORMATION

▶ Slope

The minimum recommended slope for PBR-Panel is 1:12. Metal Sales recommends that in all roof applications, sealants be used on all sidelaps with stitch screw 1'-0" on center.

▶ Substructure

PBR-Panel is designed to be utilized over open structural framing, but can easily be used with a solid substrate. To avoid panel distortion, use a properly aligned and uniform substructure.

▶ Coverage

PBR-Panels are available in a 1 1/4" rib height with a coverage width of 36".

▶ Length

Minimum factory cut length is 5'-0". Maximum recommended panel length is 45'-0". Longer panels require additional consideration in packaging, shipping, and erection. Please consult Metal Sales for recommendations.

▶ Fasteners

The fastener selection guide should be consulted for choosing the proper fastener for specific applications. Quantity and type of fastener must meet necessary loading and code requirements.

NOTE: All panels are subject to surface distortion due to improperly applied fasteners. Overdriven fasteners will cause stress and induce oil canning across the face of the panel at or near the point of attachment.

▶ Availability

Finishes: Acrylic Coated Galvalume®, MS Colorfast45®, or various Kynar 500 (PVDF) colors.
Gauges: 26ga and 24ga standard, 22ga optional

SECTION PROPERTIES

ALLOWABLE UNIFORM LIVE LOADS PSF (3 or More Equal Spans)

| Ga. | Width (in.) | Yield KSI | Weight PSF | Top in Compression | | Bottom in Compression | | Inward (Gravity / Deflection) Load | | | | | | Outward Uplift (Stress) Load | | | | | |
|-----|-------------|-----------|------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|------------------------------------|-----|-----|----|----|----|------------------------------|-----|-----|-----|----|----|
| | | | | I _{xx} in ⁴ /ft | S _{xx} in ³ /ft | I _{xx} in ⁴ /ft | S _{xx} in ³ /ft | 2' | 3' | 4' | 5' | 6' | 7' | 2' | 3' | 4' | 5' | 6' | 7' |
| 26 | 36" | 80 | 0.91 | 0.0360 | 0.0358 | 0.0307 | 0.0449 | 250 | 125 | 73 | 48 | 28 | 18 | 286 | 138 | 80 | 52 | 36 | 27 |
| 24 | 36" | 50 | 1.17 | 0.0567 | 0.0578 | 0.0443 | 0.0609 | 328 | 152 | 87 | 56 | 39 | 27 | 419 | 193 | 110 | 71 | 49 | 36 |
| 22 | 36" | 50 | 1.51 | 0.0800 | 0.0855 | 0.0633 | 0.0808 | 449 | 205 | 116 | 75 | 52 | 38 | 630 | 288 | 164 | 105 | 73 | 54 |

- Theoretical section properties have been calculated per AISI 2001 "Specification for the Design of Cold-formed Steel Structural Members." I_{xx} and S_{xx} are effective section properties for deflection and bending.
- Allowable load is calculated in accordance with AISI 2001 specifications considering bending, shear, combined bending and shear, deflection, and applicable testing when available. Allowable load considers the worst case of 3 and 4 equal span conditions. Allowable load does not address web crippling or fasteners/support connection and panel weight is not considered.
- Deflection consideration is limited by a maximum deflection ratio of L/180 of span.
- Allowable loads do not include a 1/3 stress increase in uplift.